




| 部品番号<br>PART NO. | 部 品 名 称<br>NAME OF PART | 材 質<br>MATERIAL | 数量<br>Q' TY | 部品番号<br>PART NO. | 部 品 名 称<br>NAME OF PART | 材 質<br>MATERIAL | 数量<br>Q' TY |
|------------------|-------------------------|-----------------|-------------|------------------|-------------------------|-----------------|-------------|
| 1                | BODY                    | SUSF316         | 1           | 7                | WHEEL NUT               | SUS304          | 1           |
| 2                | STEM                    | SUS630          | 1           | 8                | NAME PLATE              | A1050P          | 1           |
| 3                | GLAND NUT               | SUS316          | 1           | 9                | WASHER                  | SUS304          | 1           |
| 4                | GLAND                   | SUS316          | 1           | 10               | PANEL GASKET            | NONASBESTOS     | 1           |
| 5                | GLAND PACKING           | PTFE            | 1SET        | 11               | PACKING WASHER          | SUS316          | 1           |
| 6                | HAND WHEEL              | ADC12           | 1           | 12               | PANEL NUT               | SUS316          | 1           |

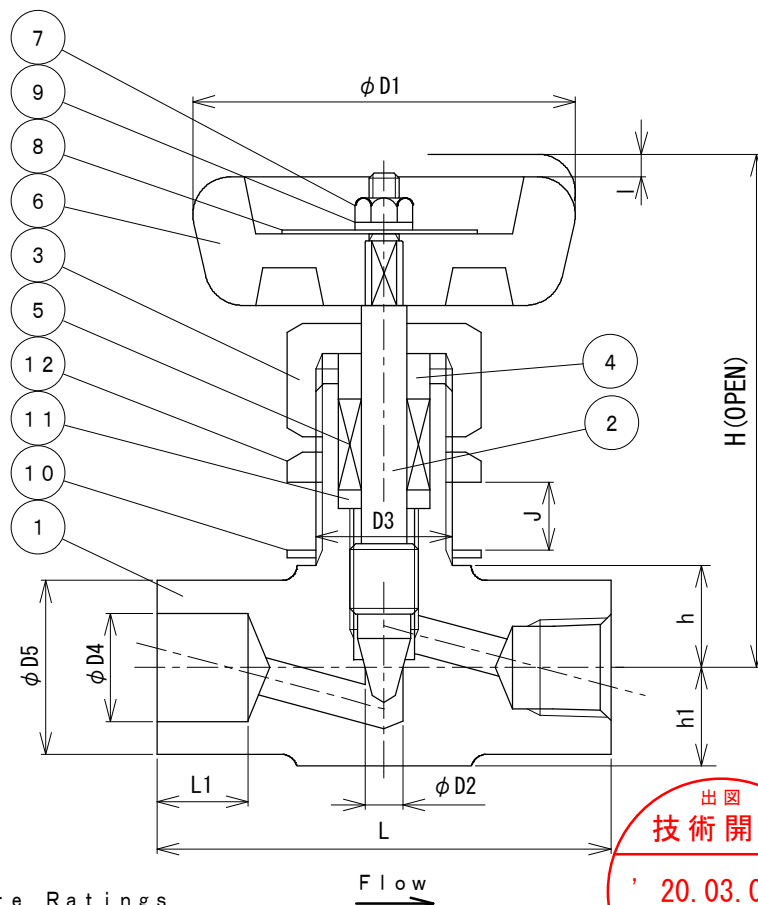

316・260K  
CHARGE No.  
SIZE



#### Pressure and Temperature Ratings

3698psig @ 100° F (25.5MPa @ 38° C)

2873psig @ 302° F (19.8MPa @ 150° C)

#### DIMENSIONS

UNIT : mm

| TYPE No.       | SIZE        | H  | D1 | D2 | D3 | D4   | D5   | L  | L1 | L3 | L4 | h  | h1   | LIFT<br>l | PANEL<br>THICK-<br>J |
|----------------|-------------|----|----|----|----|------|------|----|----|----|----|----|------|-----------|----------------------|
| SNVT-4BSW4-H   | 1/4B*RC1/4  | 69 | 55 | 5  | 18 | 14.3 | 23.0 | 60 | 10 | 14 | 11 | 17 | 13.0 | 4         | 2~4                  |
| SNVT-6BSW6-H   | 3/8B*RC3/8  | 78 | 65 | 6  | 22 | 17.8 | 26.5 | 65 | 10 | 16 | 17 | 19 | 14.0 | 5         | 2~6                  |
| SNVT-8BSW8-H   | 1/2B*RC1/2  | 84 | 65 | 8  | 22 | 22.2 | 33.0 | 75 | 10 | 15 | 22 | 22 | 17.5 | 6         | 2~8                  |
| SNVT-4BSW4NF-H | 1/4B*1/4NPT | 69 | 55 | 5  | 18 | 14.3 | 23.0 | 60 | 10 | 14 | 11 | 17 | 13.0 | 4         | 2~4                  |
| SNVT-6BSW6NF-H | 3/8B*3/8NPT | 78 | 65 | 6  | 22 | 17.8 | 26.5 | 65 | 10 | 16 | 17 | 19 | 14.0 | 5         | 2~6                  |
| SNVT-8BSW8NF-H | 1/2B*1/2NPT | 84 | 65 | 8  | 22 | 22.2 | 33.0 | 75 | 10 | 15 | 22 | 22 | 17.5 | 6         | 2~8                  |

|                                                    |                          |                          |           |                                                                                                  |                |
|----------------------------------------------------|--------------------------|--------------------------|-----------|--------------------------------------------------------------------------------------------------|----------------|
| 承認<br>APPROVED BY                                  | 検 図<br>CHECKED BY        | 設 計<br>DESIGNED BY       | 質量 WEIGHT | 材 質<br>MATERIAL                                                                                  | 数量<br>QUANTITY |
| 工場長<br>'06.8.28<br>横 沢                             | 技術開発課<br>'06.8.28<br>相 馬 | 技術開発課<br>'06.8.25<br>出 口 | 尺 度 SCALE | 名称 TITLE<br>STAINLESS STEEL NEEDLE VALVES<br>STRAIGHT TYPE SCREWED-WELD END<br>SNVT-SW*RC-H TYPE |                |
| 三興マテリアルサプライ株式会社<br>Sanko Material Supply Co., Ltd. |                          |                          |           | 図 番<br>DWG. NO.                                                                                  | 3-4512         |
|                                                    |                          |                          |           | 備 考<br>REMARKS                                                                                   | 改 番 REV.<br>6  |